

# VTR SERIES

## AC Voltage Transducers

VTR Series AC Voltage Transducers are high-performance True RMS transducers for sensing voltage in single- and three-phase installations. Applicable on circuits of 120 V, 240 V, 480 V and 600 V, the VTR Series voltage transducers provide a fully isolated, 4–20 mA output proportional to rated voltage in sinusoidal situations. Housed in a slim, compact, easy-to-install DIN rail mounted case, the VTR Series comes in a variety of voltage ranges and with four-wire terminal block connection.




### Voltage Transducer Applications

#### True RMS Voltage Monitoring

- Detect below normal or “brown out” voltage conditions; protect against possible motor overheating.
- Identify phase loss conditions by detecting voltage reduction in one or more phase of three-phase motor.
- Monitor over voltage conditions associated with regenerative voltage to help in diagnosing/avoiding motor drive issues.
- Detect voltage conditions which may cause stress in or damage to soft starter components (SCRs).

Phase Loss Protection

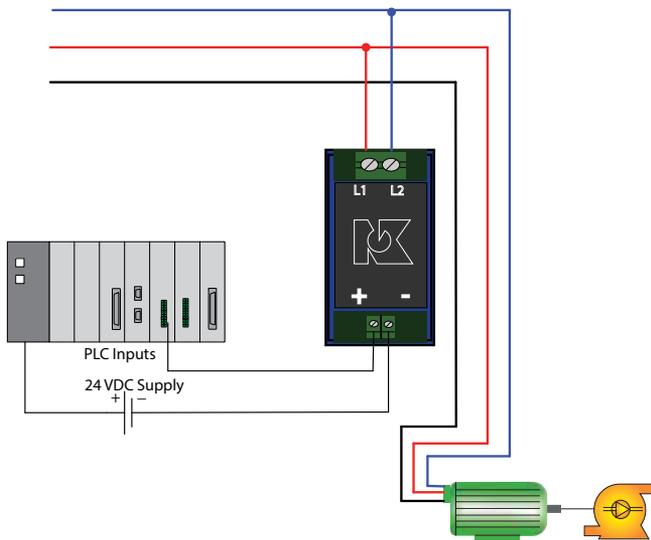

For additional Application Examples, go to [www.nktechnologies.com/applications](http://www.nktechnologies.com/applications)

### Voltage Transducer Features

#### True RMS Output

- Allows for use in situations where power supplied is poor power quality or other electrically harsh/challenging environments.

#### Standard 4–20 mA Loop-powered Output

- Industry standard output makes use with existing controllers, data loggers and SCADA equipment easy and reliable.

#### Input/Output Isolation

- Input and output circuitry electrically isolated for improved safety of use.

#### Compact DIN Rail Mounted Case\*


- Space saving 35 mm wide enclosure mounts quickly for an attractive installation.

#### UL/cUL and CE Approved


- Accepted worldwide.

\*For information on the DIN rail accessories kit, see page 140.

Voltage Transducer Dimensions

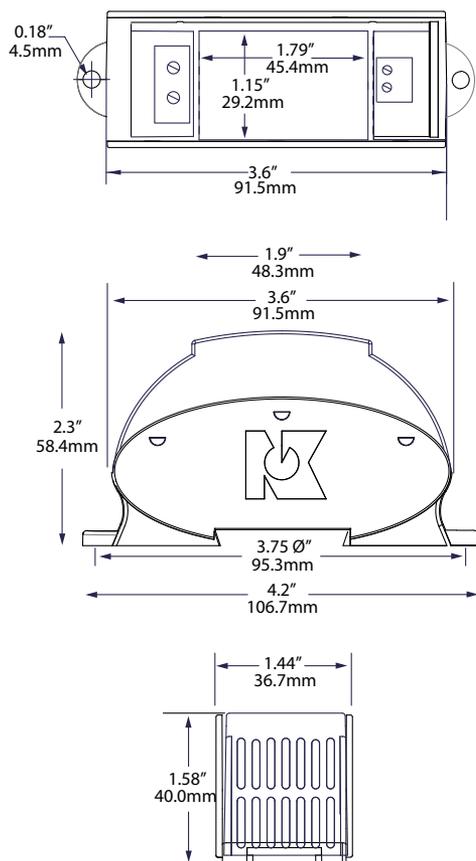

Voltage Transducer Connections

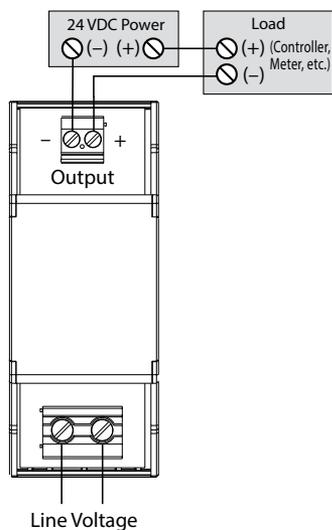

Voltage Transducer Specifications



<b>Power Supply</b>	24 VDC loop-powered (12–40 VDC)
<b>Input Range</b>	120 V, 150 V, 240 V, 480 V, 500 V, 600 V
<b>Output</b>	4–20 mA proportional
<b>Output Limit</b>	24 mA
<b>Output Loading</b>	500 Ω
<b>Input Maximum</b>	130% of range
<b>Response Time</b>	250 ms (to 90% value)
<b>Accuracy</b>	1.0% FS (10–100% of range) (1% at 60 Hz, 2.5% at 50 Hz)
<b>Isolation Voltage</b>	UL listed to 1270 VAC, tested to 5 kV
<b>Frequency Range</b>	40–100 Hz
<b>Case</b>	UL94 V-0 Flammability Rated
<b>Environmental</b>	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing
<b>Listings</b>	UL/cUL, CE

Voltage Transducer Ordering Information

Sample Model Number: VTR1-420-24L-DIN  
True RMS voltage transducer with 120 V voltage range, standard 4–20 mA proportional output; 24 V loop-powered with a DIN rail compatible case.



(1) Voltage Range

1	120 V
2	150 V
3	240 V
4	480 V
5	500 V
6	600 V

(2) Output Type

420	4–20 mA
-----	---------

(3) Supply Voltage

24L	24 V loop-powered
-----	-------------------

(4) Mounting

DIN	DIN rail compatible
-----	---------------------

**OEMs** Test & Evaluation Units for OEMs  
Free program expedites evaluation process. See page 3 for details.

