

SINEAX TI 807

Passive DC signal isolator



without power supply,
Ex- and non-Ex version, in housing N17 or S17
for rail and wall mounting

CE 0102 Ex II (1) G resp. II (2) G

Application

The signal isolator **SINEAX TI 807** serves to electrically insulate the analogue DC signal in the range 0...20 mA which depending on version is then converted to a current or voltage signal (0...20 mA or 0...10 V). It operates passively and does not require a separate power supply, but derives the little auxiliary energy it needs from the DC signal.

The series of isolators also includes "intrinsically safe" explosion-proof versions with either an intrinsically safe **input** signal [EEx ib] IIC or intrinsically safe **output** signal [EEx ia] IIC. They are thus suitable for use in connection with intrinsically safe equipment installed in the hazardous area.

The signal isolator is supplied in two different housings depending on the number of transmitter channels to be isolated: SINEAX TI 807-5 with **one** transmitter channel to be isolated in housing Type **N17** (Fig. 1) and SINEAX TI 807-1 with **two or three** channels in housing Type **S17** (Fig. 2). Both types of housing are suitable for either rail or wall mounting.

Features / Benefits

- Electrically insulated analogue DC signals 0...20 mA / Prevents the transfer of interference voltages and currents. Solves grounding problems in meshed signal networks
- Highly accurate / Performs its isolating function with negligible transmission error
- No power supply needed / Saves wiring costs and is easy to install in existing plants
- Available in type of protection "Intrinsic safety" [EEx ib] IIC or [EEx ia] IIC (see "Table 6: Data on explosion protection")
- Snaps onto a DIN rail or screws onto a wall or panel / Adaptable to the circumstances at the place of installation
- Compact and narrow. Housing only 17.5 mm wide / Low space requirement, high packing density. 27 devices fit into a 19" rack

Layout and mode of operation

The description below refers to SINEAX TI 807-5 with **one** isolation and transmission channel.

The DC signal isolator comprises a DC chopper Z, an isolating stage T, a rectifier G and an oscillator O.

The chopper converts the DC input signal $E = 0...20 \text{ mA}$ to an AC signal which is transformed with electrical insulation, rectified, smoothed and appears at the output as a DC **current** signal $A = 0...20 \text{ mA}$ (Fig. 3, left). Versions with a DC output **voltage**



Fig. 1. SINEAX TI 807-5 with **one** isolation and transmission channel, in housing **N17**, clipped onto a top-hat rail.



Fig. 2. SINEAX TI 807-1 with **two or three** isolation and transmission channels, in housing **S17**, screw hole mounting brackets pulled out.

signal $A = 0...10 \text{ V}$ have a resistive burden of 500Ω through which the current flows (Fig. 3, right).

The chopper is controlled by the oscillator which obtains its power from the DC signal.

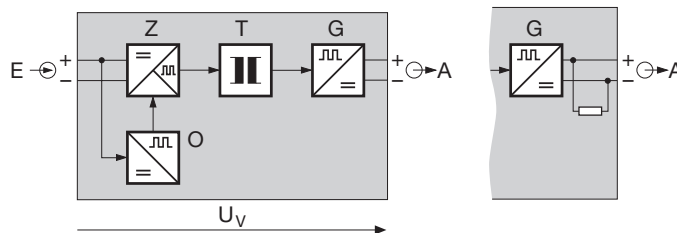


Fig. 3. Block diagram for a function unit.

SINEAX TI 807

Passive DC signal isolator

Technical data

Input signal E \rightarrow

| | |
|---------------------------|---|
| DC current signal I_E : | 0...20 mA |
| Max. permissible current: | 50 mA |
| Voltage limiter: | Non-Ex version: 27 V \pm 5% (with zener diode) Ex version: 18 V, \pm 5% |

Output signal A \leftarrow

(DC current or DC voltage)

DC current signal I_A : 0...20 mA

Voltage drop U_V :

| | |
|---------|---|
| < 2.8 V | with standard (non-Ex) version |
| < 4.7 V | with Ex versions (input signal(s) "intrinsically safe") |
| < 6.3 V | with Ex versions (output signal(s) "intrinsically safe") |

Max. burden:

| | |
|---------------|---|
| 1000 Ω | with standard (non-Ex) version |
| 500 Ω | with Ex versions (input signal(s) "intrinsically safe") |
| 500 Ω | with Ex versions (output signal(s) "intrinsically safe") |

Limit: Approx. 40 mA

Residual ripple: < 20 mV ss

Time constant: Approx. 3 ms

Response time¹
acc. to IEC 770: Approx. 15 ms

DC voltage signal U_A : 0...10 V

Voltage drop U_V :

| | |
|---------|---|
| < 2.8 V | with standard (non-Ex) version |
| < 4.7 V | with Ex versions (input signal(s) "intrinsically safe") |
| < 6.3 V | with Ex versions (output signal(s) "intrinsically safe") |

Internal resistance: 500 Ω

Limit:

| | |
|--------|---|
| < 26 V | with standard (non-Ex) version |
| < 16 V | with Ex versions (input signal(s) "intrinsically safe") |
| < 16 V | with Ex versions (output signal(s) "intrinsically safe") |

Residual ripple: < 20 mV ss

Time constant: Approx. 3 ms

Response time¹
acc. to IEC 770: Approx. 15 ms

Accuracy data

| | |
|---------------|--|
| Error limits: | < \pm 0.1% (Reference value 20 mA of output signal, typical linearity error included) |
| | < \pm 0.2% (Reference value 10 V of output signal, typical linearity error included) |

Reference conditions

| | |
|---------------------------|---|
| DC current signal I_E : | 0...20 mA |
| Ambient temperature: | 23 °C \pm 1 K |
| Output burden: | 250 Ω (at DC current output signal) \geq 5 M Ω (at DC voltage output signal) |

Additional error

Burden influence: < 0.05% / 100 Ω
(at DC **current** output signal)

Temperature coefficient: < 50 ppm/K

Installation data

| | |
|-------------------------|--|
| Mechanical design: | Housing N17 or housing S17 Dimensions see section "Dimensional drawings" |
| Material of housing: | Lexan 940 (polycarbonate). Flammability Class V-0 acc. to UL 94, self-extinguishing, non-dripping, free of halogen |
| Mounting: | Snapping onto top-hat rail 35 x 7.5 or 35 x 15 mm (acc. to EN 50 022) or directly onto a wall with 2 screws and – adapter (for TI 807-5....) – pull-out screw hole brackets (for TI 807-1....) |
| Mounting position: | Any |
| Electrical connections: | Screw terminals with wire guards for light PVC wiring and max. 2 x 0.75 mm ² or 1 x 2.5 mm ² |

¹ This is the time which transpires before the output signal reaches the error limit of 1% for a step change of the input signal from 0 \rightarrow 90%.

SINEAX TI 807

Passive DC signal isolator

Weight:

| | |
|---------------|---|
| approx. 100 g | TI 807-5.... (housing N17) |
| approx. 180 g | TI 807-1.... (housing S17) with 2 isolation and transmission channels |
| approx. 200 g | TI 807-1.... (housing S17) with 3 isolation and transmission channels |

Regulations

Test voltage kV, 50 Hz, 1 min.:

| | | |
|--------|---|---|
| 4.0 kV | TI 807-5.... (housing N17) standard (non-Ex) version | Input versus output |
| 2.3 kV | TI 807-5.... (housing N17) Ex versions (input or output signal "intrinsically safe") | |
| 2.3 kV | TI 807-1.... (housing S17) non-Ex and Ex versions (input or output signals "intrinsically safe") | Inputs versus outputs Inputs versus inputs Outputs versus outputs |

Surge voltage kV, 1.2/50 µs:

| | | |
|---------|---|--|
| 5.0 kV | TI 807-5.... (housing N17) Standard (non-Ex) version | Input versus output |
| 4.25 kV | TI 807-5.... (housing N17) Ex versions (input or output signal "intrinsically safe") | |
| 4.25 kV | TI 807-1.... (housing S17) non-Ex and Ex-versions (input or output signals "intrinsically safe") | Inputs versus outputs Inputs versus outputs Outputs versus outputs |

Electromagnetic compatibility:

The standards DIN EN 50 081-2 and DIN EN 50 082-2 are observed

Intrinsically safe:

Acc. to DIN EN 50 020: 1996-04

Electrical design:

Acc. to IEC 1010 resp. EN 61 010

Contamination level:

2

Overtoltage category:

II

Protection (acc. to IEC 529 resp. EN 60529):

Housing IP 40
Terminals IP 20

Ambient conditions

Operating temperature:

-25 to + 55 °C
-20 to + 55 °C
(for the Ex versions: input or output signal(s) "intrinsically safe")

Storage temperature:

-40 to + 70 °C

Annual mean relative humidity:

≤ 75% standard climatic rating
≤ 95% improved climatic rating

Seismic test:

5 g, < 200 Hz,
2 h in each of 3 directions

Shock:

50 g,
10 shocks in each of 3 directions

Standard version in housing N17 for rail or wall mounting

The following signal isolator versions are available as standard versions. It is only necessary to quote the **Order No.:**

Table 1: Instruments in standard (non-Ex) version (input *and* output signal *non intrinsically safe*)

| Description | Climatic rating | Output signal | Order Code | Order No. |
|--|-----------------|---------------|-------------|-----------|
| Passive DC signal isolator , Standard (non-Ex) version, input signal 0...20 mA, with 1 isolation and transmission channel | standard | 0...20 mA | 807 – 51100 | 999 154 |

SINEAX TI 807

Passive DC signal isolator

Table 2: Instruments in [EEx ib] IIC version (input signal intrinsically safe)

| Description | Climatic rating | Output signal | Order Code | Order No. |
|--|-----------------|---------------|-------------|-----------|
| Passive DC signal isolator , [EEx ib] IIC, input signal intrinsically safe 0...20 mA, output signal non intrinsically safe, with 1 isolation and transmission channel | standard | 0...20 mA | 807 – 52100 | 999 196 |

Table 3: Instruments in [EEx ia] IIC version (output signal intrinsically safe)

| Description | Climatic rating | Output signal | Order Code | Order No. |
|--|-----------------|---------------|-------------|-----------|
| Passive DC signal isolator , [EEx ia] IIC, input signal non intrinsically safe 0...20 mA, output signal intrinsically safe, with 1 isolation and transmission channel | standard | 0...20 mA | 807 – 56100 | 999 170 |

Standard versions in housing S17 for rail and wall mounting

The following signal isolator versions are available as standard versions. It is only necessary to quote the **Order No.**:

Table 4: Instruments in standard (non-Ex) version (input and output signal non intrinsically safe)

| Description | Number of channels | Output signal | Order Code | Order No. |
|---|--------------------|---------------|-------------|-----------|
| Passive DC signal isolator , standard (non-Ex) version, input signal 0...20 mA, standard climatic rating | 2 channels | 0...20 mA | 807 – 11200 | 995 061 |
| | 3 channels | 0...20 mA | 807 – 11300 | 996 936 |

The complete Order Code 807-.... and/or a description should be stated for other versions (see "Table 5: Specification and ordering information").


Table 5: Specification and ordering information (see also "Tables 1 to 4: Standard versions")

| Order Code 807 – | | | | | | | |
|---|--------|-------|---------------|---|---|---|---|
| Features, Selection | *SCODE | no-go | 1 | 2 | 3 | 4 | 5 |
| 1. Mechanical design | | | | | | | |
| 1) Housing S17 | B | | 1 | | | | |
| 5) Housing N17 | C | | 5 | | | | |
| 2. Version | | | | | | | |
| 1) Standard (non-Ex), input and output signal(s) non intrinsically safe | | | . 1 | | | | |
| 2) [EEx ib] IIC, input signal(s) intrinsically safe | | | . 2 | | | | |
| 6) [EEx ia] IIC, output signal(s) intrinsically safe | | | . 6 | | | | |

SINEAX TI 807

Passive DC signal isolator

Signal isolator in housing S17 with three isolation and transmission channels

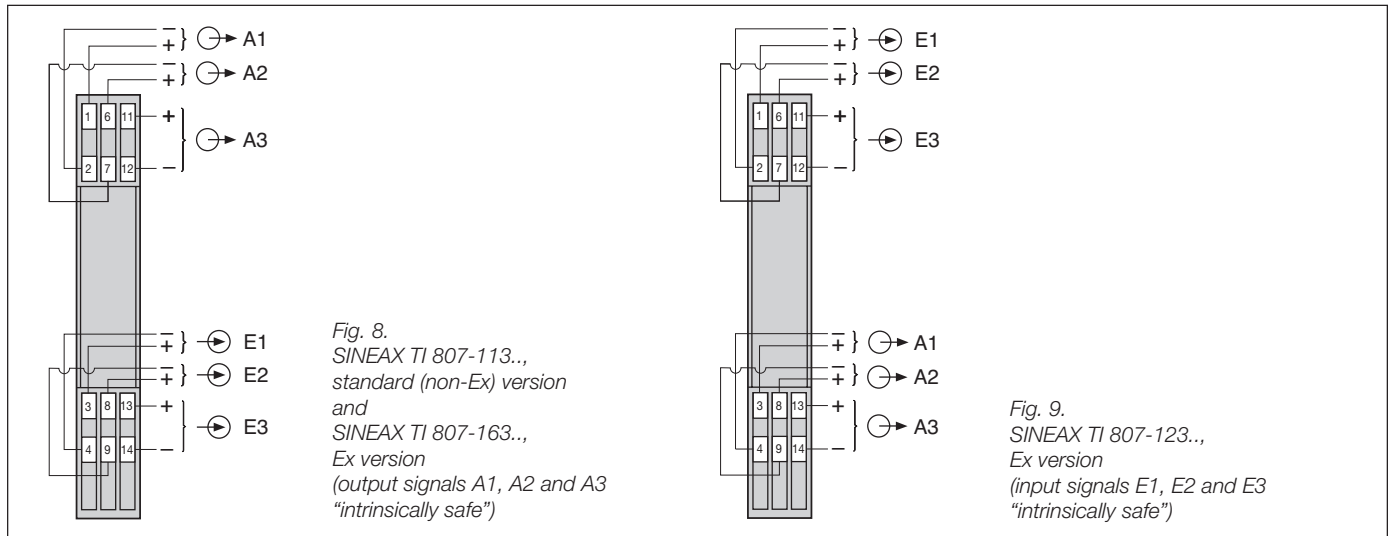

Dimensional drawings

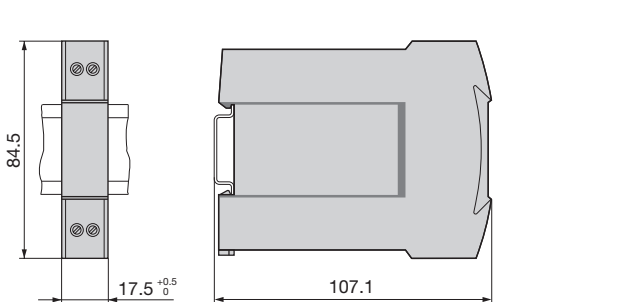


Fig. 10. SINEAX TI 807-5.... (housing **N17**) clipped onto a top-hat rail (35 × 7.5 or 35 × 15 mm, acc. to EN 50 022).

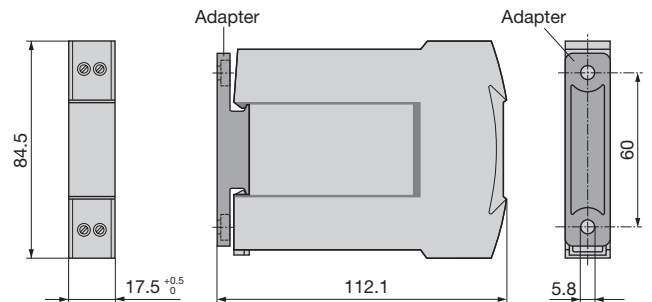


Fig. 11. SINEAX TI 807-5.... (housing **N17**) with adapter for directly wall mounting.

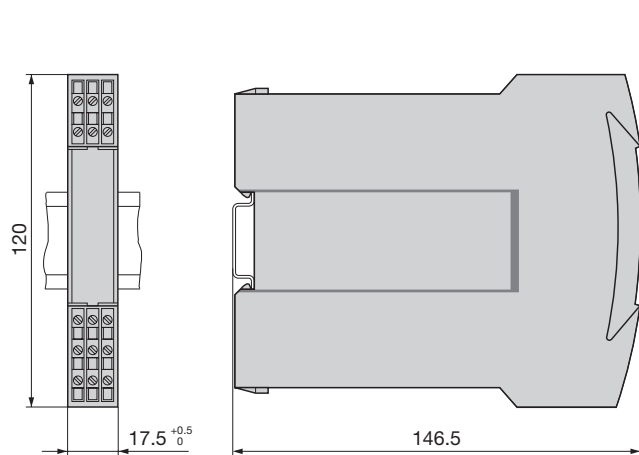


Fig. 12. SINEAX TI 807-1.... (housing **S17**) clipped onto a top-hat rail (35 × 7.5 or 35 × 15 mm, acc. to EN 50 022).

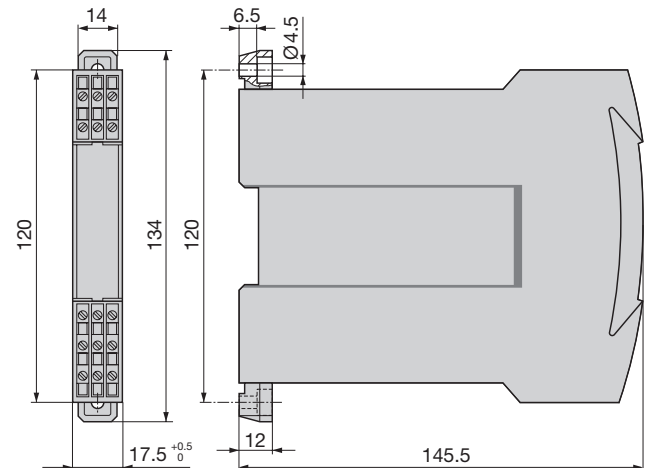


Fig. 13. SINEAX TI 807-1.... (housing **S17**) screw hole mounting brackets pulled out.

SINEAX TI 807

Passive DC signal isolator

Standard accessories

- 1 Adapter (for signal isolators TI 807-5...., variants in housing type **N17** only)
- 1 Operating Instructions each in German, French and English for SINEAX TI 807-5 in housing type **N17**
- 1 Operating Instructions in three languages: German, French and English for SINEAX TI 807-1 in housing type **S17**
- 1 Type Examination Certificate (for instruments in type of protection "Intrinsically safe" only)

MOD-TRONIC
INSTRUMENTS LIMITED

1 Delta Park Blvd, #12 Brampton, ON L6T 5G1
Tel 905-457-6322 or 1-800-794-5883
Fax 905-457-4716 or 1-800-830-7122
sales@mod-tronic.com www.mod-tronic.com

 Member of
GMC Instruments Group