




**MODULE SOCKETS**

- API 008
- API 008 FS
- API 011
- API 011 FS

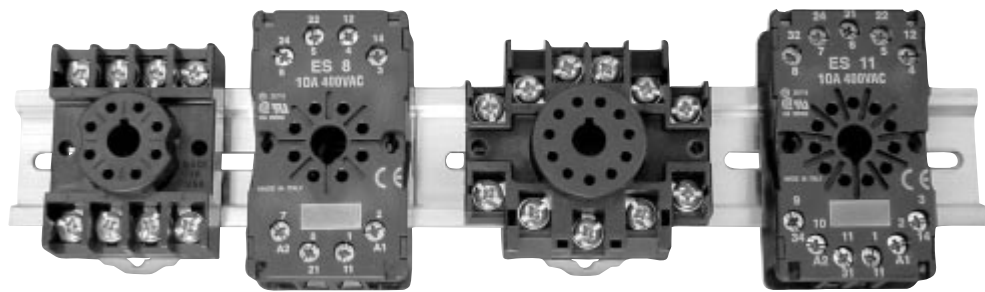

API TK36  
DIN Rail

API 008  
8-pin socket

API 008FS  
8-pin finger-  
safe socket

API 011  
11-pin socket

API 011FS  
11-pin finger-  
safe socket

**8 and 11 Pin Octal Style Sockets, Standard and Finger-Safe, Surface or DIN-Rail Mountable**

**ELECTRICAL RATING**

API 008 600 Volts, 10 Amps  
 API 008 FS, API 011, API 011 FS 300 Volts, 10 Amps

**CONSTRUCTION**

- Contacts • Brass, Nickel Plated
- Screws • Binder Head, 6-32x1/4" Steel Zinc Plated  
 • Pressure Clamp, 6-32x5/16" Steel, Zinc Plated  
 • Wire Range #12 - #22 AWG Solid or Stranded
- Screws, FS • Box Lug, M3 Steel, Nickel Plated  
 • Maximum Wire Gauge #14 AWG
- Molding • Black Break-Resistant Thermoplastic

**AGENCY APPROVALS**

- Standard Models • UL recognized File No. E60008
- FS models • UL recognized File No. E113714
- Standard Models • CSA certified File No. LR29513
- FS models • CSA certified File No. LR26716
- All Models • CE







**SOCKETS**

- API 008 8 Pin Octal
- API 008 FS 8 Pin Octal, Finger Safe
- API 011 11 Pin Octal Style
- API 011 FS 11 Pin Octal Style, Finger Safe

**DESCRIPTION**

**ACCESSORIES DESCRIPTION**

- API TK36 Prepunched Aluminum DIN Rail (1 Meter Lengths)

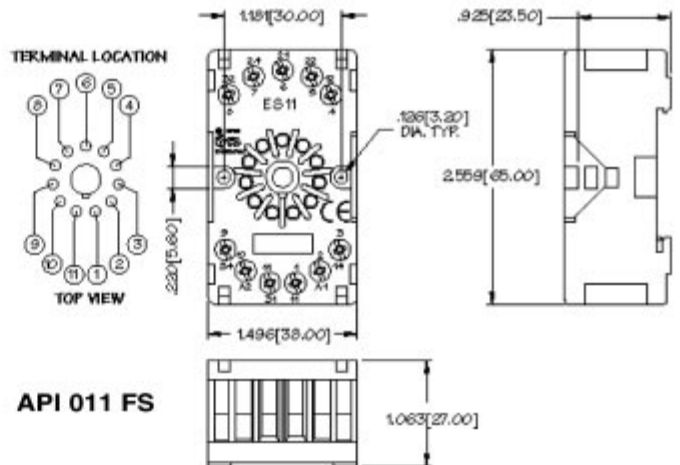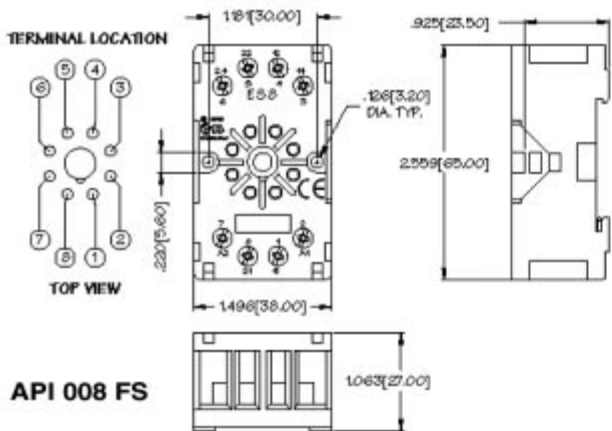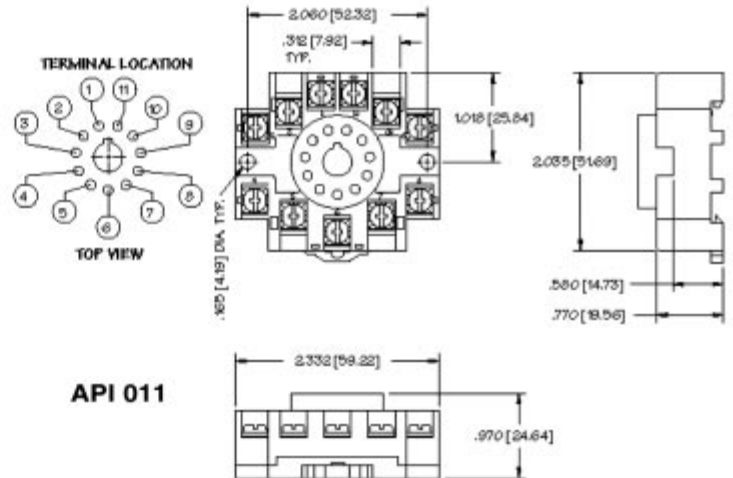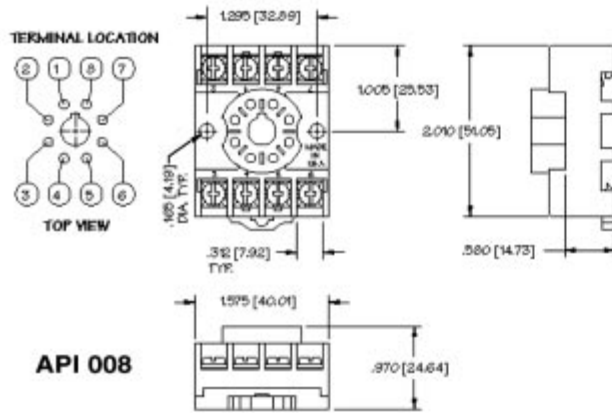


API maintains a constant effort to upgrade and improve its products. Specifications are subject to change without notice. Consult factory for your specific requirements.

## Module Accessories

| Model       | Description   |
|-------------|---|
| API 008     | 8-Pin Socket, DIN Rail or Surface Mount                                 |
| API 008-5A  | 8-Pin Socket, DIN Rail or Surface Mount, with 5 A Current Shunt         |
| API 008-20A | 8-Pin Socket, DIN Rail or Surface Mount, with 20 A Current Shunt        |
| API 008 FS  | 8-Pin Socket, Finger-Safe, DIN Rail or Surface Mount                    |
| API 008 W   | 8-Pin Socket, Plastic Snap-Track or Surface Mount                       |
| API 011     | 11-Pin Socket, DIN rail or Surface Mount                                |
| API 011-5A  | 11-Pin Socket, DIN or Surface Mount, with 5 A Current Shunt             |
| API 011-20A | 11-Pin Socket, DIN or Surface Mount, with 20 A Current Shunt            |
| API 011 FS  | 11-Pin Socket, Finger-Safe, DIN Rail or Surface Mount                   |
| API 011 W   | 11-Pin Socket, Plastic Snap-Track or Surface Mount                      |
| API TK36    | Aluminum DIN Rail, 39" Long   |
| API TK48    | Plastic Snap-Track, 4 Feet Long   |
| API CLP1    | Hold-Down Spring for API 008, API 008 FS, API 011 or API 011 FS Sockets |



API CLP1  
Hold-down spring  
for API 008,  
API 008 FS,  
API 011  
or API 011 FS  
Sockets

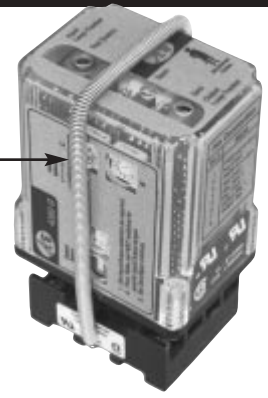

API TK36  
Aluminum  
DIN Rail,  
39" Long




API 008-5A  
API 008-20A  
Socket with  
Current Shunt

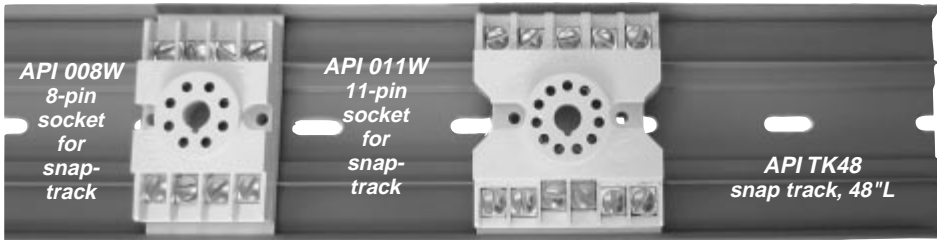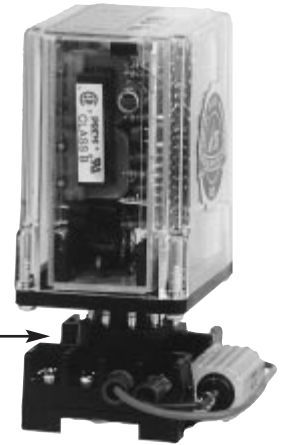

## NEMA 4X Enclosures

| Model    | Description                                    |
|----------|--|
| API 535  | 1 module<br>4.61" L x 2.64" W x 4.68" D        |
| API 555  | 2 modules<br>4.61" L x 4.61" W x 4.68" D       |
| API 756  | 3 modules<br>6.57" L x 4.61" W x 5.66" D       |
| API 775  | Up to 6 modules<br>6.57" L x 6.57" W x 4.68" D |
| API 1076 | Up to 8 modules<br>9.53" L x 6.57" W x 5.66" D |

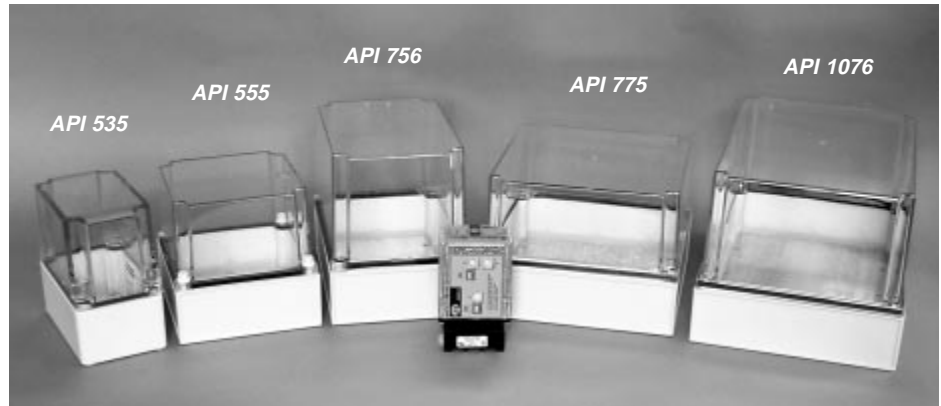

## Explosion-Proof Housing




Explosion-proof housings are manufactured of cast aluminum.

API EPH can hold one plug-in style module and has a clear glass cover.

NEC Class I, Groups B, C & D; Class II, Groups E, F & G; Class III  
NEMA 3, 4, 7BCD, 9EFG  
UL standard 1203  
CSA Standard C22.2-30  
FM Class No. 3615

**NOTE:** Dimensions and style may vary depending on application. Consult factory if exact specifications are required.

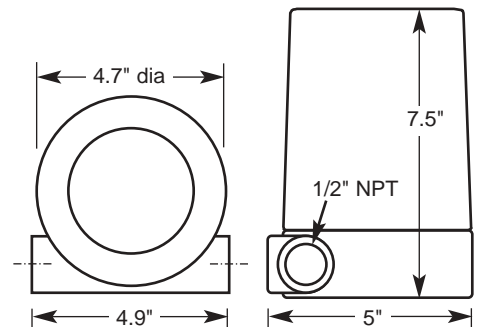

**Mod-tronic Instruments Limited**

Tel: 905 457-6322

Fax: 905 457-4716

Toll Free: 800 794-5883

[www.mod-tronic.com](http://www.mod-tronic.com)