
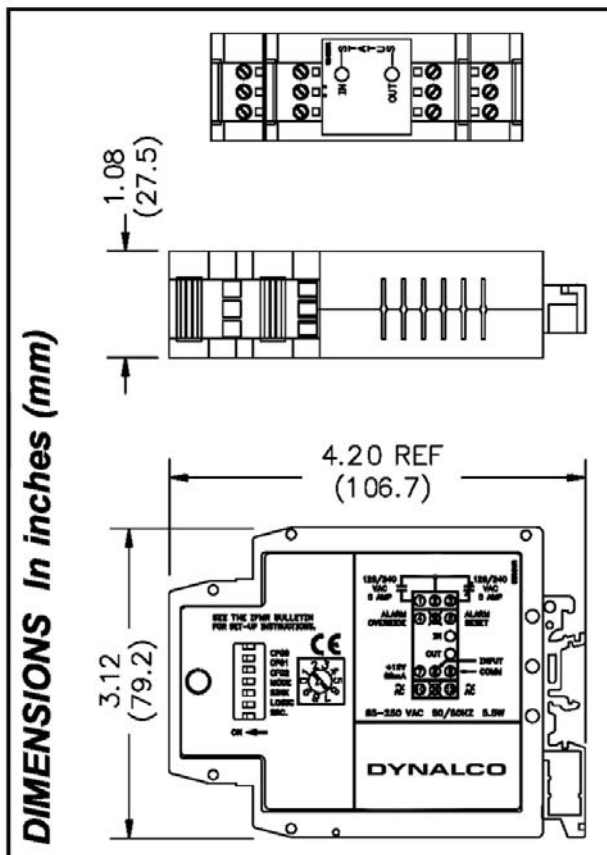


# SW-100 Speed Switch

- Single setpoint for over/underspeed protection
- DIN rail mounting
- Simple configuration - no test equipment or computer needed

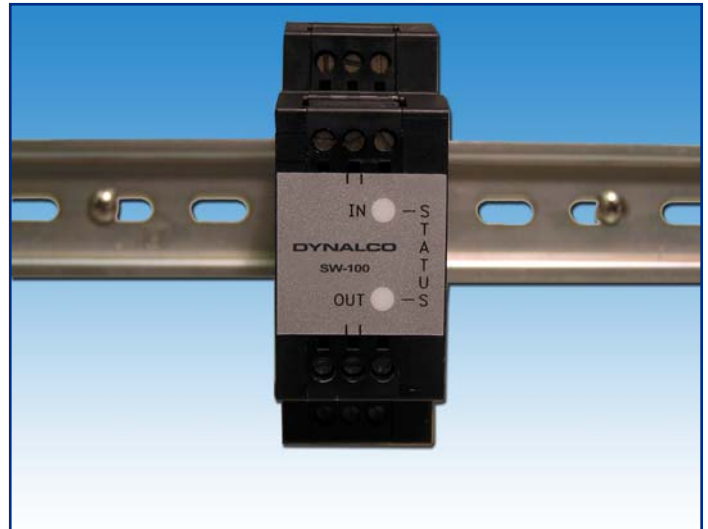

## Features

- Accepts frequency input, and controls a single relay (SPDT) for over/under speed trip
- Relay configurable for non-latching or latching with external alarm override and reset
- Relay contacts rated 5A @ 120/240VAC or 28VDC (resistive)
- LED indicators for input signal and relay status
- Calibrate with or without input signal
- Signal input DIP switch selectable to accept switch contacts, mag pickups, CMOS or TTL circuits
- 9-32VDC or 85-250VAC power supply
- 0.1Hz - 25KHz operating frequency range
- Accuracy 0.1% for setpoints

SW-100.r1.012609

**DYNALCO**

CRANE

A division of Crane Co.

**MOD-TRONIC**  
INSTRUMENTS LIMITED

1 Delta Park Blvd, #12 Brampton, ON L6T 5G1  
Tel 905-457-6322 or 1-800-794-5883  
Fax 905-457-4716 or 1-800-830-7122  
sales@mod-tronic.com www.mod-tronic.com