


Explosionproof/Flameproof Thermocouple Sensors



Ex d IIC
AEx d IIC

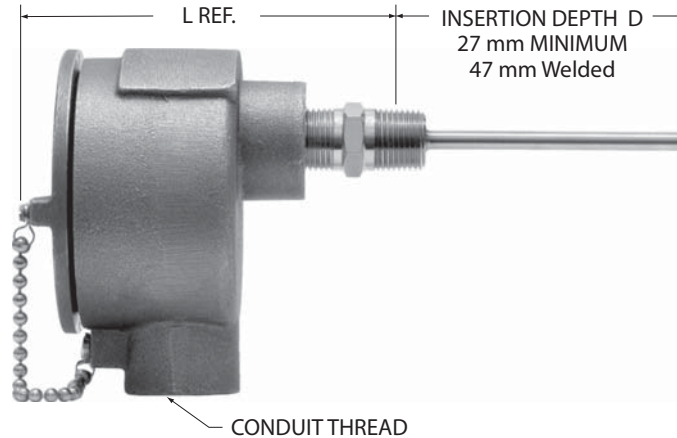

Overview

Explosionproof and flameproof rating for hazardous areas where accurate temperature sensing is critical.

- Tip sensitive, MgO filled probes available
- Hazardous area rated

Specifications

Temperature range:

- 50 to 260°C (-58 to 500°F)
- 50 to 600°C (-58 to 1112°F) for MgO Probes

Material:

Probe: Stainless steel (tip sensitive models have copper alloy tip).

Holder: Stainless steel.

Connection head:

- Copper free aluminum alloy (CH104)
- 316 stainless steel (CH106).

Pressure rating: See table on next page.

Insulation resistance: 10 megohms min. at 100 VDC, leads to case. Ungrounded junctions only.

Connection: Terminal block for wires to 14 AWG.

Time constant: Typical value in moving water.

Tip sensitive:

- Grounded 1.5 seconds.
- Ungrounded 7 seconds.

MgO filled:

- Grounded: 1.5 seconds.
- Ungrounded: 5.0 seconds.

Explosionproof and flameproof ratings:

National and Canadian Electrical Code:

- Class I, Divisions 1 and 2, Groups B, C, and D,
- Class II, Groups E, F, and G,
- T6 (Ta = 40°C),
- T2 (Ta = 260°C). Ta limited to 160°C for CSA Class II locations.

National Electrical Code (Article 505):

- Class I, Zones 1 and 2, AEx d IIC,
- T6 (Ta = 40°C), T2 (Ta = 260°C).

Canadian Electrical Code (IEC 60079):

- Zones 1 and 2, Ex d IIC,
- T6 (Ta = 40°C), T2 (Ta = 260°C).

Temperature Transmitters

Minco's Tempran™ RTD transmitters provide a 4 to 20 mA signal or HART® Protocol that can be sent over long distances with a simple 2-wire system. See Section 4 for complete temperature transmitter specifications.

Contact Minco if transmitter is required

Hazardous area requirements

For more information on how to classify a hazardous area, methods of protection, and the various standards and agencies (including FM, CSA, IECEx and ATEX), call Mod-Tronic at 1-800-794-5883.

▼ = **STANDARD OPTIONS**
Specifications subject to change

Connection head and fitting options

CH104: Aluminum IP65, Type 3 and 4.

CH106: 316 stainless steel IP66, Type 3, 4, and 4X.

Fitting	Process thread	Pressure Rating	L REF.	Code	Minimum Insertion Depth (mm)
Welded	1/2 - 14 NPT	200 psi (13.8 bar)	4.4" (112 mm)	0*	47
Welded	G 1/2	200 psi (13.8 bar)	4.2" (107 mm)	2*	47
Adjustable spring-loaded	1/2 - 14 NPT	50 psi (3.4 bar)	5.7" (144 mm)	4	27
Adjustable spring-loaded	G 1/2	50 psi (3.4 bar)	5.7" (144 mm)	6	27
Fixed spring-loaded	1/2 - 14 NPT	None	4.4" (112 mm)	8**	27

* Welded fitting only available with 0.250 MgO filled probes [minimum insertion (2.5" 63mm)]

** 0.236 and 0.250 diameters only for fixed spring-loaded fittings.

Note: Connection head dimensions are found on pages 3-2 to 3-3.

Assembly numbers

Probe diameters	0.215" (5.5 mm)		0.236" (6.0 mm)		0.250" (6.4 mm)	
	Single	Dual	Single	Dual	Single	Dual
Number of elements						
Tip-sensitive	AS766	AS767	AS706	AS707	AS726	AS727
MgO filled			AS708	AS709	AS728	AS729

Specification and order options

AS706	Assembly number from table
4	Fitting from table
E	Junction type from table
U	Junction Grounding: G = Grounded U = Ungrounded
100	Insertion depth D (mm): See table for minimums
P	
3	Conduit thread: 3 = 1/2 - 14 NPT 4 = 3/4 - 14 NPT
A	Connection head material: A = Aluminum S = 316 Stainless Steel
0	Extension: 0 = No Extension 2 = 1/2 NPT Nipple (2")/Union (2.6" length adder) 3 = 1/2 NPT Nipple (3")/Union (3.6" length adder) 4 = 1/2 NPT Nipple (4")/Union (4.6" length adder) 6 = 1/2 NPT Nipple (6")/Union (6.6" length adder)
X0X	No Thermowell
AS7064EU100P3A0X0X = Sample part number	

Junction types

Thermocouple Junction	
Chromel-Constantan	E
Iron-Constantan	J
Chromel-Alumel	K
Copper-Constantan	T

▼ = STANDARD OPTIONS

Specifications subject to change