


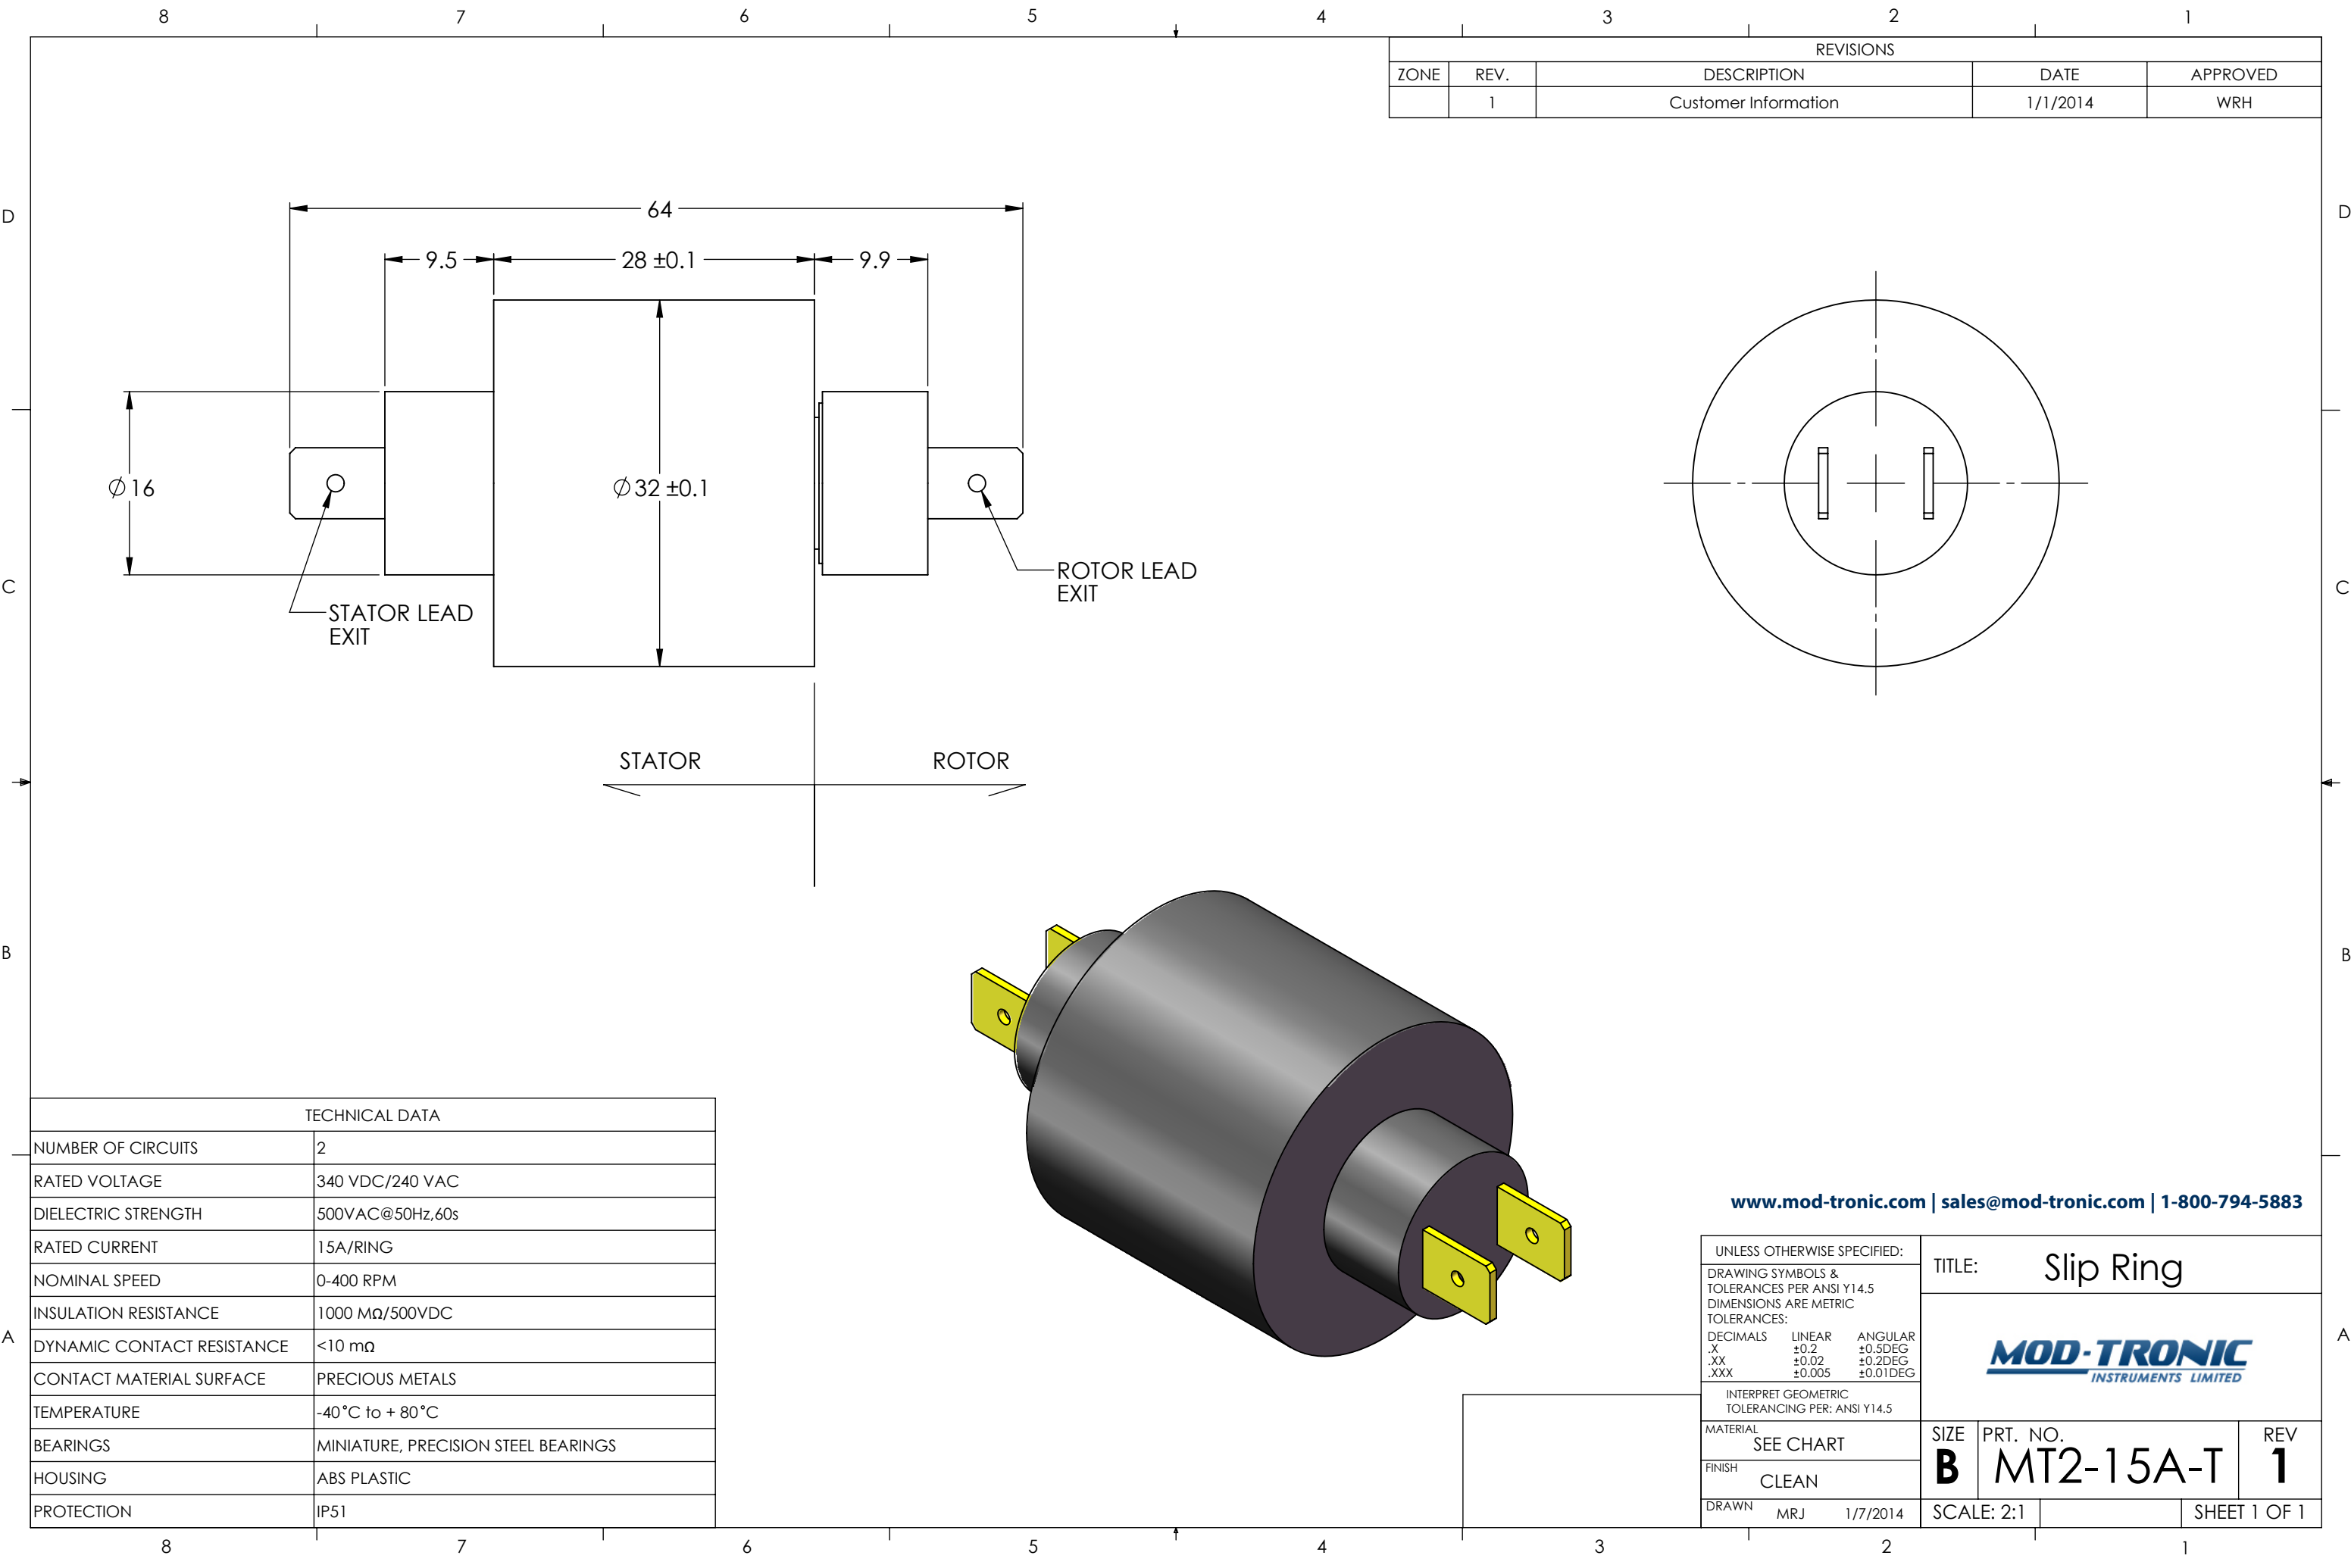

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	Customer Information	1/1/2014	WRH

TECHNICAL DATA	
NUMBER OF CIRCUITS	2
RATED VOLTAGE	340 VDC/240 VAC
DIELECTRIC STRENGTH	500VAC@50Hz,60s
RATED CURRENT	15A/RING
NOMINAL SPEED	0-400 RPM
INSULATION RESISTANCE	1000 MΩ/500VDC
DYNAMIC CONTACT RESISTANCE	<10 mΩ
CONTACT MATERIAL SURFACE	PRECIOUS METALS
TEMPERATURE	-40°C to + 80°C
BEARINGS	MINIATURE, PRECISION STEEL BEARINGS
HOUSING	ABS PLASTIC
PROTECTION	IP51

www.mod-tronic.com | sales@mod-tronic.com | 1-800-794-5883

UNLESS OTHERWISE SPECIFIED:		TITLE: Slip Ring			
DRAWING SYMBOLS & TOLERANCES PER ANSI Y14.5 DIMENSIONS ARE METRIC TOLERANCES:					
DECIMALS	LINEAR				ANGULAR
.X	±0.2				±0.5DEG
.XX	±0.02				±0.2DEG
.XXX	±0.005				±0.01DEG
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5					
MATERIAL	SEE CHART	SIZE	PRT. NO.	REV	
FINISH		B	MT2-15A-T	1	
CLEAN					
DRAWN	MRJ 1/7/2014	SCALE: 2:1		SHEET 1 OF 1	