
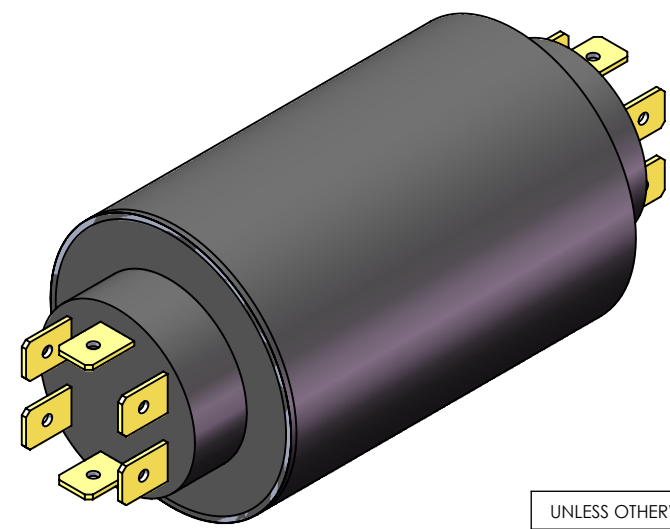


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	Customer Information	1/1/2014	WRH

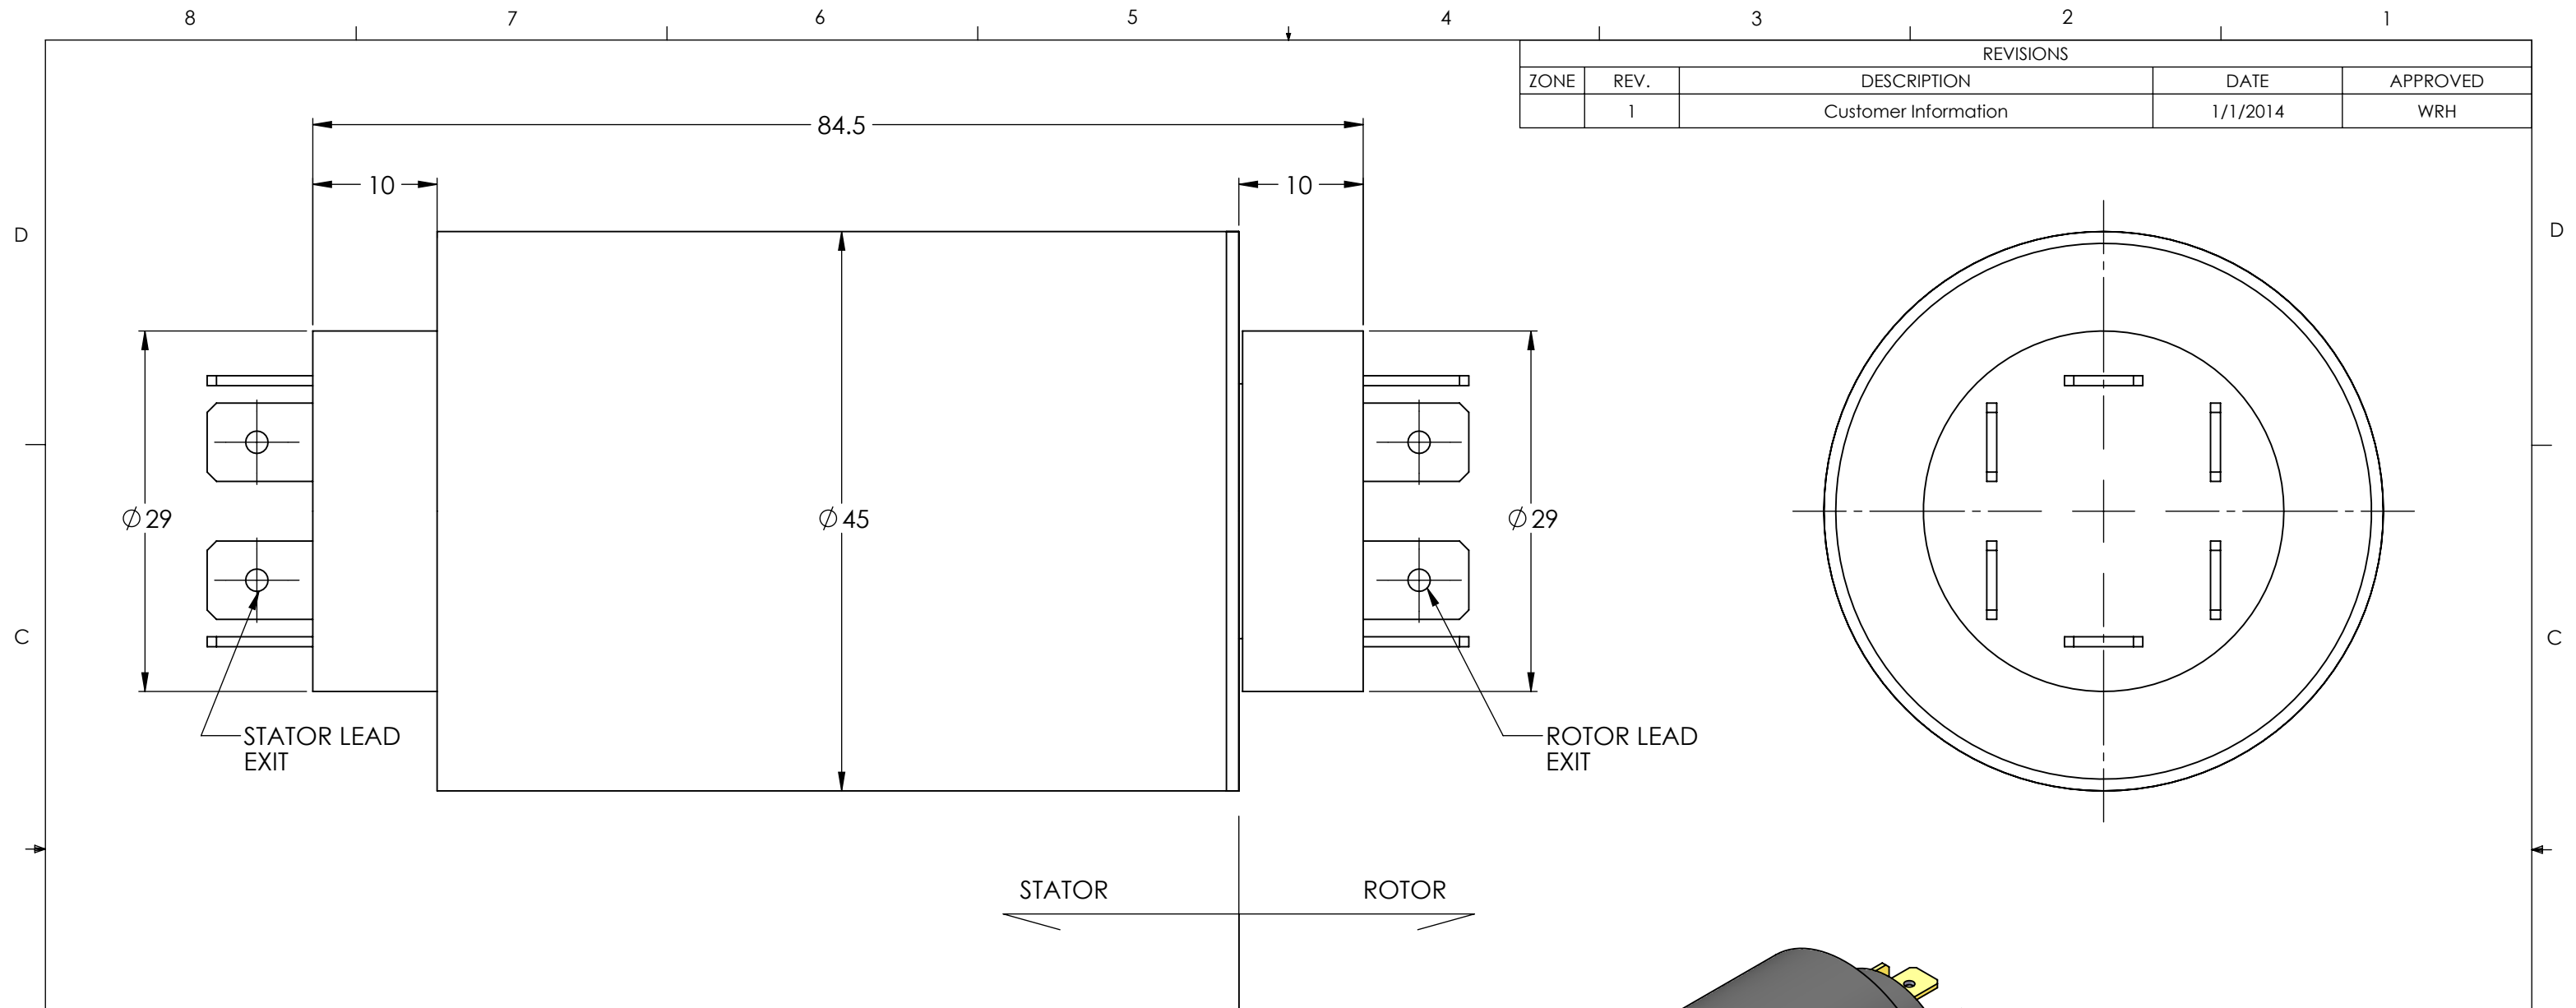

TECHNICAL DATA	
NUMBER OF CIRCUITS	6
RATED VOLTAGE	240 VAC/VDC
DIELECTRIC STRENGTH	500VAC@50Hz, 60s
RATED CURRENT	20A/RING
NOMINAL SPEED	0-400 RPM
INSULATION RESISTANCE	1000 M Ω /500VDC
DYNAMIC CONTACT RESISTANCE	<10 m Ω
CONTACT MATERIAL SURFACE	PRECIOUS METALS
TEMPERATURE	-40°C to + 80°C
BEARINGS	MINIATURE, PRECISION STEEL BEARINGS
HOUSING	ABS PLASTIC
PROTECTION	IP51

UNLESS OTHERWISE SPECIFIED: DRAWING SYMBOLS & TOLERANCES PER ANSI Y14.5 DIMENSIONS ARE METRIC TOLERANCES: DECIMALS LINEAR ANGULAR .X ±0.2 ±0.5DEG .XX ±0.02 ±0.2DEG .XXX ±0.005 ±0.01DEG		TIT				
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5						
MATERIAL	SEE CHART			SIZE	PRT. NO.	REV
FINISH	CLEAN			B	MT6-20A-T	1
DRAWN	MRJ 1/7/2014	SCALE: 2:1	SHEET 1 OF 1			