




Series
TSSC

Digital Dispensing Temperature Control

Controls Product Temperature and Dispensing Flow Rates

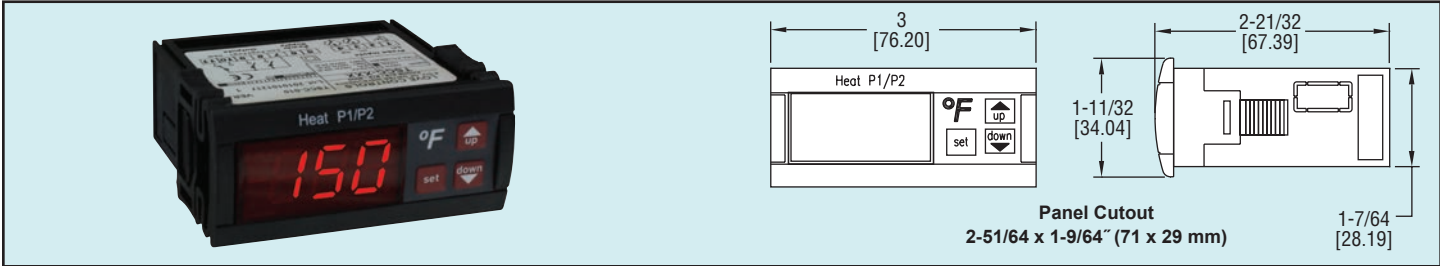

The Series TSSC Digital Dispensing Temperature Control is used to monitor and control product temperature and dispensing rate in the production of melted cheese, chili, or other heated food products. One selectable PTC or NTC thermistor is used to monitor the product temperature while a SPDT relay is used to control the temperature. Two SPST relays are used for controlling two dispensing rates for either different size containers or different products. A three digit, easy-to-read display is included on the controller. The buttons on the face of the controller enable the user to program the desired parameters into the controller itself. Parameters can be copied from one device to another using our TS2-K configuration key. Security protection is offered using a password code. Includes TS-6 temperature probe.

ACCESSORIES

See page reference  below.

Model	Supply Power	Unit
TSSC-010	115 VAC	°F
TSSC-011	115 VAC	°C
TSSC-020	230 VAC	°F
TSSC-021	230 VAC	°C

SPECIFICATIONS

Probe Range:

PTC: -58 to 302°F (-50 to 150°C);
NTC: -58 to 230°F (-50 to 110°C).

Input: 2 free voltage contact input:
PTC (1000Ω @ 25°C); NTC (10K Ω @ 25°C).

Output:

1 each relay SPDT 16 A @ 240 VAC resistive, 5 A inductive;
2 each relay SPST 5 A @ 240 VAC resistive.

Control Type: ON/OFF.

Power Requirements: 115 VAC ±10%; 230 VAC ±10% (depending on model).

Power Consumption: 4 VA.

Accuracy: ±1% FS.

Display: 3-digit and sign, 1/2" red LED digits.

Resolution: 1°.

Memory Backup: Nonvolatile memory.

Temperature Limits:

Operating: 32 to 158°F (0 to 70°C);
Storage: -4 to 176°F (-20 to 80°C).

Weight: 8.8 oz (250 g).

Front Panel Rating: IP64.

Agency Approvals: CE, UL.