

# SINEAX V 610

## Temperature Transmitter

**Two-wire,  
for Pt 100 inputs,  
for rail mounting in housing K7**



### Application

SINEAX V 610 is a two-wire transmitter. It is designed for **measuring temperature in combination with resistance thermometers Pt 100**. Thermocouple non-linearities are automatically compensated. The output signal is a current in the range 4...20 mA.

The sensor circuit is monitored for open and short-circuits and the output responds in a defined manner if one is detected.

The power supply (12...30 V DC) is connected together with the signal by the two leads connected to the measurement output (loop powered).

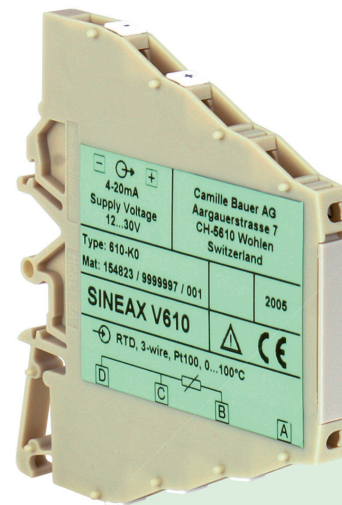


Fig. 1. Measuring transmitter SINEAX V 610 in housing K7.

### Features / Benefits

- Two-wire transmitter for installation in the process environment
- Open and short-circuit sensor circuit supervision / Defined output response should the supervision pick up
- Compact design (housing only 7 mm wide) / Makes maximum use of available space

### Versions

Measured variables	Measuring range	Order No.
Temperatures with resistance thermometers for <b>three-wire</b> connection Pt 100, IEC 60 751	0 ... 100 °C	154 823
	0 ... 150 °C	154 831
	0 ... 200 °C	154 849
	- 30 ... + 70 °C	154 857
	- 50 ... + 150 °C	154 865

### Technical data

#### Measuring input →

Temperature with resistance thermometers

Resistance types: Type Pt 100 (IEC 60 751)

Measuring current: ≤ 0.20 mA

Standard circuit:

Input resistance:

Lead resistance:

Mains ripple suppression:

**Three-wire connection**

$R_i > 10 \text{ M}\Omega$

≤ 30 Ω per lead

For 50 Hz

#### Measuring output →

(output/powering circuit)


Output signal  $I_A$ :

Impressed DC current, **linear with temperature**

Standard range:

4...20 mA, 2-wire technique

External resistance (burden):  $R_{\text{ext}} \text{ max.} = \frac{\text{Power supply [V]} - 12 \text{ V}}{\text{Max. output current [mA]}}$

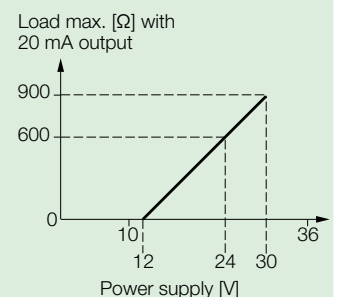

# SINEAX V 610

## Temperature Transmitter

Residual ripple in output current: < 1% p.p.  
 Response time: Approx. 2 s

### Accuracy data (acc. to EN/IEC 60 770-1)

Reference value: Measuring span  
 Basic accuracy: Error limits  $\leq \pm 0.2\%$  at reference conditions

### Reference conditions

Ambient temperature 23 °C  
 Power supply 18 V DC  
 Output burden 250  $\Omega$   
 Settings Pt100, 3-wire, 0...600 °C

### Additional errors (additive)

Low measuring ranges  
 Resistance thermometer  $\pm 0.3$  K at measuring spans < 400 °C  
 High initial value (Additional error = Factor · initial value)  
 Resistance thermometer  $\pm 0.00075$  K / °C  
 Influence of lead resistance at resistance thermometer  $\pm 0.01\%$  per  $\Omega$   
 Linearisation  $\pm 0.3\%$

### Influencing factors

Temperature  $\leq \pm (0.15\% + 0.15$  K) per 10 K with temperature measurement  
 Power supply influence (power supply on terminals)  $\leq \pm 0.005\%$  per V  
 Long-time drift  $\leq \pm 0.1\%$   
 Common and transverse mode influence  $\leq \pm 0.2\%$

### Open and short-circuit sensor circuit supervision

Signalling modes: Output signal with open or short-circuit rising to 21.6 mA

### Power supply

DC voltage: Supply 12...30 V DC  
 max. residual ripple 1% p.p.  
 (supply must not fail below 12 V)  
 Protected against wrong polarity

### Installation data

Housing: Housing K7 for rail mounting  
 Dimensions see section "Dimensional drawings"

Material of housing: Polyamide  
 Flammability Class V2 acc. to UL 94, self-extinguishing, non-dripping, free of halogen

Mounting: For snapping  
 – onto rail G acc. to EN 50 035 – G32  
 or  
 – onto top-hat rail acc. to EN 50 022 (35 x 15 mm or 35x7.5 mm)

### Standards

Electromagnetic compatibility: The standards EN 50 081-2 and EN 50 082-2 are observed


Protection (acc. to IEC 529 resp. EN 60 529): Housing IP 40  
 Terminals IP 20

Electrical standards: Acc. to IEC 1010 resp. EN 61 010

### Ambient conditions

Climatic rating: IEC 60 068-2-1/2/3  
 Ambient temperature range: –25 to +55 °C  
 Storage temperature range: –40 to +80 °C  
 Annual mean relative humidity:  $\leq 75\%$ , no moisture condensation  
 Altitude: 2000 m max.  
 Indoor use statement!

### Electrical connections

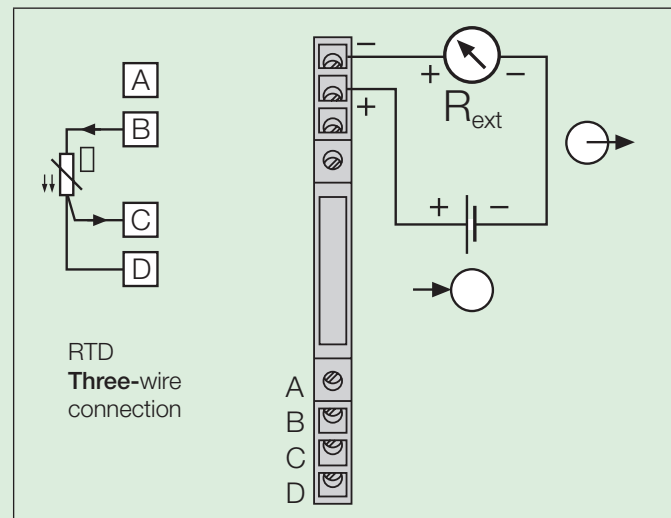

⊕ = Measuring input  
 ⊕ → = Two-wire measuring output (measuring circuit) (4...20 mA signal)  
 → ⊕ = Power supply 12...30 V DC

# SINEAX V 610 Temperature Transmitter

## Accessories and spare parts

Description	Order No.
Operating Instructions V 610 Bd in German	151 944
Operating Instructions V 610 Bf in French	151 960
Operating Instructions V 610 Be in English	151 952

## Standard accessories

1 Operating Instructions, each in German, French and English

## Dimensional drawings

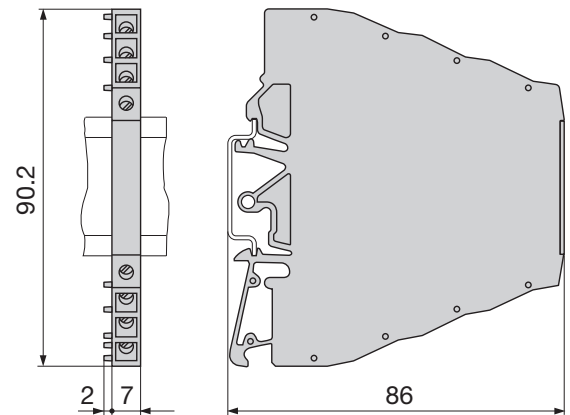


Fig. 2. SINEAX V 610 in housing **K7**  
clipped onto a top-hat rail EN 50 022 – 35 x 7.5.

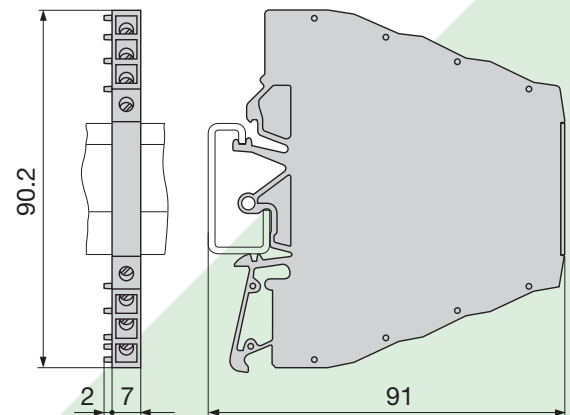


Fig. 3. SINEAX V 610 in housing **K7**  
clipped onto a rail "G" EN 50 035 – G32.

[www.mod-tronic.com](http://www.mod-tronic.com) | [sales@mod-tronic.com](mailto:sales@mod-tronic.com) | 1-800-794-5883